

UDC 697.175.3

IRSTI 67.09.55

RESEARCH ARTICLE

FIBERGLASS IN CONSTRUCTION: KEY ASPECTS AND ADVANTAGES

G.M. Abdukalikova¹ , L.A. Sivachenko² , E.M. Smagulova^{1*} , A.S. Mukasheva¹ ,
G.A. Zhairbayeva¹ , J.B. Konarbaeva¹ , Sh.B. Toleubayeva¹ 

¹L.N. Gumilyov Eurasian National University, 010008, Astana, Kazakhstan

²Belarusian-Russian University, Republic of Belarus, Mogilev

Abstract. *The study examines the application of fiberglass materials in modern construction with a focus on their structural, economic, and environmental advantages over traditional materials such as steel and polyvinyl chloride. The aim of the research is to systematize the properties of fiberglass and evaluate its effectiveness in improving the performance and sustainability of building structures. The research methodology is based on a comparative analysis of scientific literature, experimental data, and technical standards related to fiberglass composites. The study also incorporates an assessment of physical and mechanical characteristics, durability indicators, and life cycle cost analysis of fiberglass products in various operating conditions. The results demonstrate that fiberglass materials possess high tensile strength (up to 1000 MPa), low density (20–25% of steel weight), and high resistance to corrosion and aggressive environments. The use of fiberglass contributes to a reduction in operational costs by 20–40%, decreases maintenance expenses by up to 75%, and extends the service life of structures beyond 50 years. In addition, fiberglass improves energy efficiency due to low thermal conductivity and stable hydraulic performance. Environmental analysis shows a reduced carbon footprint in transportation and long-term эксплуатация, despite challenges related to recycling. The study concludes that fiberglass represents a перспективный материал for sustainable construction, combining durability, economic efficiency, and environmental adaptability. Its application contributes to the development of innovative engineering solutions and enhances the reliability of construction systems under various climatic and operational conditions.*

Keywords: *construction, fiberglass, resin, pipe, corrosion resistance, durability, building structures, deformations*

***Corresponding author**

Elmira Smagulova, e-mail: elmirasmagulova@mail.ru

<https://doi.org/10.51488/1680-080X/2026.1-06>

Received 15 December 2025; Revised 08 February 2026; Accepted 22 February 2026

ӘОЖ697.175.3
ҒТАМР 67.09.55
ҒЫЛЫМИ МАҚАЛА

ҚҰРЫЛЫС САЛАСЫНДАҒЫ ШЫНЫТАЛШЫҚ: НЕГІЗГІ АСПЕКТІЛЕРІМЕН АРТЫҚШЫЛЫҚТАРЫ

Г.М. Абдукаликова¹ , Л.А. Сиваченко² , Э.М. Смагулова^{1*} , А.С. Мукашева¹ ,
Г.А. Жаирбаева¹ , Ж.Б. Конарбаева¹ , Ш.Б. Төлеубаева¹ 

¹Л.Н. Гумилев атындағы Еуразия ұлттық университеті, 010008, Астана, Қазақстан
²Беларусь - Ресей университеті, 212000, Могилев, Беларусь Республикасы

Аңдатпа. Бұл зерттеуде заманауи құрылыс саласында шыныталшық материалдарының қолданылуы қарастырылып, олардың болат және поливинилхлорид сияқты дәстүрлі материалдармен салыстырғандағы конструкциялық, экономикалық және экологиялық артықшылықтарына талдау жасалады. Зерттеудің мақсаты – шыныталшықтың қасиеттерін жүйелеу және оның құрылыс конструкцияларының тиімділігі мен тұрақтылығын арттырудағы рөлін бағалау. Зерттеу әдістемесі шыныталшық негізіндегі композиттік материалдарға қатысты ғылыми әдебиеттерді, эксперименттік деректерді және нормативтік құжаттарды салыстырмалы талдауға негізделген. Сонымен қатар, шыныталшық өнімдерінің физикалық-механикалық қасиеттері, беріктік көрсеткіштері және әртүрлі пайдалану жағдайларындағы өмірлік цикл құнына талдау жүргізілді. Зерттеу нәтижелері шыныталшық материалдарының жоғары созылу беріктігіне (1000 МПа дейін), төмен тығыздыққа (болат салмағының 20–25%-ы) және коррозия мен агрессивті ортаға жоғары төзімділікке ие екенін көрсетті. Шыныталшықты қолдану пайдалану шығындарын 20–40%-ға төмендетуге, техникалық қызмет көрсету шығындарын 75%-ға дейін азайтуға және конструкциялардың қызмет ету мерзімін 50 жылдан астам уақытқа ұзартуға мүмкіндік береді. Сонымен қатар, материал төмен жылу өткізгіштігі мен тұрақты гидравликалық сипаттамалары есебінен энергия тиімділігін арттырады. Экологиялық талдау тасымалдау және пайдалану кезеңдерінде көміртек ізінің азаюын көрсетеді, алайда қайта өңдеу мәселелері өзекті болып қала береді. Қорытындылай келе, шыныталшық тұрақты құрылыс үшін перспективалы материал болып табылады, себебі ол ұзақ мерзімділік, экономикалық тиімділік және экологиялық бейімділікті үйлестіреді. Оны қолдану инновациялық инженерлік шешімдерді дамытуға және әртүрлі климаттық және пайдалану жағдайларында құрылыс жүйелерінің сенімділігін арттыруға ықпал етеді.

Түйін сөздер: құрылыс, шыныталшық, шайыр, құбыр, коррозияға төзімділік, ұзақтұру, құрылыс конструкциялары, деформациялар

*Автор-корреспондент

Эльмира Смагулова, e-mail: elmirasmagulova@mail.ru

<https://doi.org/10.51488/1680-080X/2026.1-06>

Алынды 15 желтоқсан 2025; Қайта қаралды 08 ақпан 2026; Қабылданды 22 ақпан 2026

УДК 697.175.3
МРНТИ 67.09.55
НАУЧНАЯ СТАТЬЯ

СТЕКЛОВОЛОКНО В СТРОИТЕЛЬСТВЕ: ОСНОВНЫЕ АСПЕКТЫ И ПРЕИМУЩЕСТВА

Г.М. Абдукаликова¹ , Л.А. Сиваченко² , Э.М. Смагулова^{1*} , А.С. Мукашева¹ ,
Г.А. Жаирбаева¹ , Ж.Б. Конарбаева¹ , Ш.Б. Толеубаева¹ 

¹Евразийский национальный университет им. Л.Н. Гумилева, 010008, Астана, Казахстан

²Белорусско-Российский университет, 212000, Могилев, Республика Беларусь

Аннотация. В работе рассматривается применение стекловолоконных материалов в современном строительстве с акцентом на их конструкционные, экономические и экологические преимущества по сравнению с традиционными материалами, такими как сталь и поливинилхлорид. Цель исследования заключается в систематизации свойств стекловолокна и оценке его эффективности для повышения эксплуатационных характеристик и устойчивости строительных конструкций. Методология исследования основана на сравнительном анализе научной литературы, экспериментальных данных и нормативно-технических документов, посвященных композитным материалам на основе стекловолокна. В работе также проведена оценка физико-механических характеристик, показателей долговечности и анализа стоимости жизненного цикла изделий из стекловолокна в различных условиях эксплуатации. Результаты исследования показывают, что стекловолоконные материалы обладают высокой прочностью на растяжение (до 1000 МПа), низкой плотностью (20–25% от массы стали) и высокой устойчивостью к коррозии и агрессивным средам. Применение стекловолокна позволяет снизить эксплуатационные затраты на 20–40%, сократить расходы на обслуживание до 75% и увеличить срок службы конструкций более чем до 50 лет. Кроме того, материал способствует повышению энергоэффективности за счет низкой теплопроводности и стабильных гидравлических характеристик. Экологический анализ показывает снижение углеродного следа при транспортировке и эксплуатации, несмотря на существующие проблемы переработки. В заключение установлено, что стекловолокно является перспективным материалом для устойчивого строительства, сочетая долговечность, экономическую эффективность и экологическую адаптивность. Его применение способствует развитию инновационных инженерных решений и повышению надежности строительных систем в различных климатических и эксплуатационных условиях.

Ключевые слова: строительство, стекловолокно, смола, труба, коррозионная устойчивость, долговечность, строительные конструкции, деформации

*Автор-корреспондент

Эльмира Смагулова, e-mail: elmirasmagulova@mail.ru

<https://doi.org/10.51488/1680-080X/2026.1-06>

Поступила 15 декабря 2025; Пересмотрено 08 февраля 2026; Принято 22 февраля 2026

ACKNOWLEDGEMENTS/SOURCE OF FUNDING

The study was conducted using private sources of funding.

CONFLICT OF INTEREST

The authors state that there is no conflict of interest.

The authors declare that no generative artificial intelligence technologies or AI-based tools were used in the preparation of this article.

АЛҒЫС / ҚАРЖЫЛАНДЫРУ КӨЗІ

Зерттеу жеке қаржыландыру көздерін пайдалана отырып жүргізілді.

МҮДДЕЛЕР ҚАҚТЫҒЫСЫ

Авторлар мүдделер қақтығысы жоқ деп мәлімдейді.

Авторлар мақаланы дайындау барысында генеративті жасанды интеллект технологиялары мен жасанды интеллектке негізделген технологияларды пайдаланбағанын мәлімдейді.

БЛАГОДАРНОСТИ/ИСТОЧНИК ФИНАНСИРОВАНИЯ

Исследование проводилось с использованием частных источников финансирования.

КОНФЛИКТ ИНТЕРЕСОВ

Авторы заявляют, что конфликта интересов нет.

Авторы заявляют о том, что при подготовке статьи не использовались технологии генеративного искусственного интеллекта и технологии, основанные на искусственном интеллекте.

1 INTRODUCTION

In this article, the authors analyze and systematize the main aspects of the use of fiberglass products in construction and demonstrate their advantages over traditional building materials. They consider the impact of fiberglass on the efficiency and sustainability of building structures.

The objectives set by the researchers are as follows:

- to study the properties and characteristics of fiberglass materials, their types and areas of application in construction.
- to analyze the advantages of fiberglass products compared to traditional building materials, including strength, lightness, corrosion resistance, and other performance characteristics.
- assessing the impact of fiberglass on the stability and reliability of building structures to determine what specific advantages it brings in terms of the durability and safety of facilities.
- researching examples of the use of fiberglass products in existing construction projects, highlighting successful cases and the results obtained.

Trends in modern construction are focused not only on solving problems related to the functionality of buildings and the use of innovative materials that improve the quality and durability of structures, but also on significantly reducing their cost. One solution to this issue has been the use of fiberglass products in construction, which are attracting growing interest in the scientific community (**Hollaway, 2019**).

Today, fiberglass products are increasingly used in construction due to their strength, lightness, and durability. In this context, fiberglass products deserve special attention. As a composite material, fiberglass has unique physical and mechanical properties, making it an ideal candidate for use in various construction applications. Following on from this fundamental research (**Pickering et al., 2016; Bank, 2006**), the authors focus on specific construction applications: the use of fiberglass reinforcement to strengthen concrete structures, the development of fiberglass insulation and cladding panels (**Islam et al., 2016; Nassif et al., 2024; Valery et al., 2018**), and the creation of complex architectural elements (**Triantafillou, 2019**). Comparative analyses of the durability and corrosion resistance of fiberglass products compared to traditional metal products in aggressive environments are being conducted (**Robert & Benmokrane, 2013**).

In this article, the authors analyze and systematize the main aspects of the use of fiberglass products in construction and demonstrate their advantages over traditional building materials. They examine the impact of fiberglass on the efficiency and sustainability of building structures.

The objectives set by the researchers are as follows:

- to study the properties and characteristics of fiberglass materials, their types and areas of application in construction.
- to analyze the advantages of fiberglass products compared to traditional building materials, including strength, lightness, corrosion resistance, and other performance characteristics.
- assessing the impact of fiberglass on the stability and reliability of building structures to determine what specific advantages it brings in terms of durability and safety.
- exploring examples of the use of fiberglass products in existing construction projects, highlighting successful cases and results.

The application of glass fiber and glass fiber composites (fiberglass) in the construction industry is the subject of active scientific analysis, which is reflected in a significant number of publications. Contemporary scientific literature demonstrates a thorough examination of issues related to the use of glass fiber in construction. A theoretical basis for composite materials science has been formed, and a significant amount of experimental and calculated data on their behavior in structures has been accumulated. Current research is shifting towards solving practical problems of long-term operation, cost optimization, fire safety, and sustainable development, which indicates the transition of the technology from the category of innovative to proven and scientifically sound solutions for the modern construction industry.

The basis for its application is the unique physical and mechanical properties of glass fiber obtained by drawing it from a melt (**Li & Watson, 2019**). Research in this area focuses on the rela-

tionship between glass composition, fiber formation technology, and final strength characteristics. A more applied area of work is devoted to the properties of polymer composites, where glass fiber acts as reinforcing filler. As noted in Barbero's (Barbero, 2017) work, effective strengthening of the polymer matrix is achieved through an optimal combination of fiber type, orientation, and volume fraction.

An important area of research is the development and study of hybrid composites, in which glass fiber is combined with other fibers (e.g., carbon or basalt) to synergistically improve properties, as discussed in detail by Swolfsetal (Yentl et al., 2024).

In structural mechanics and design, the use of fiberglass reinforcement (GFRP rebars) as a corrosion-resistant alternative to steel for reinforcing concrete is being widely researched (D'Anti-no et al., 2024).

In his review, Holaway (Hollaway, 2010; Kay-Uwe Schober et al., 2016) highlights the growing role of FRP composites in the reconstruction and reinforcement of existing structures, as well as in the creation of new lightweight architectural forms, which expands the possibilities for modern architects and engineers.

A significant number of publications are devoted to comparative analysis of glass fiber composites with traditional materials (steel, aluminum, wood). The analysis is conducted not only based on strength and stiffness criteria, but also on total life cycle cost.

Studies similar to Karbhari's (Karbhari, 2010) work indicate that although the initial cost of GFRP elements may be higher, their superior corrosion resistance and durability in aggressive environments (salt spray, chemical exposure) result in significant savings in maintenance and repair costs in the long term, making their use economically viable for bridge decks, port infrastructure elements, and chemical plants.

The key challenge for the widespread introduction of polymer composites in construction remains ensuring their durability and fire safety. Mechanisms of property degradation under the influence of ultraviolet radiation, water, and the alkaline environment of concrete are being studied (Mathieu & Brahim, 2013). Special resins (e.g., phenolic or furan-based) and flame retardant additives are being developed to improve fire resistance. Keller et al. (Keller & Bai, 2016). Presented models for assessing the residual load-bearing capacity of GFRP structures after exposure to high temperatures. Issues related to the disposal and recycling of composite materials are also becoming an important part of contemporary research aimed at improving the environmental sustainability of technologies (Géraldine et al., 2016).

2 METHODS AND MATERIALS

Fiberglass products are finding an increasingly wide range of applications in construction due to their unique properties and advantages. Fiberglass, the main component of these products, plays a key role in providing high performance characteristics of the final materials.

Fiberglass is a material consisting of fine glass fibers, formed by softening glass mass and subsequently drawing it into fibers (Tolmachev&Ivanov, 2019). These fibers possess high strength, durability, and resistance to various environmental factors. Fiberglass can be used on its own or in combination with other materials such as plastics, cement, and metal, forming composites.

Fiberglass has a number of unique properties that make it ideal for use in construction. Due to its high tensile strength, fiberglass is used to reinforce structural elements such as concrete panels, fiber-reinforced concrete, and roofs (Motseykis et al., 2018). Fiberglass is corrosion-resistant, making it suitable for environments exposed to moisture, chemicals, and salt. This property is particularly relevant for marine construction and structures located in aggressive climatic zones (Duyunova et al., 2021). Fiberglass products are characterized by low thermal conductivity, allowing them to be effectively used in thermal insulation systems. This helps reduce heat loss and, consequently, save energy. Unlike organic materials, fiberglass does not support the growth of microorganisms, ensuring the durability of products and safety for health. Fiberglass is significantly lighter than traditional construction materials, simplifying transportation and assembly of structures, as well as re-

ducing the load on foundations. Fiberglass products can be used in a wide variety of applications. They are suitable for creating diverse structures, from decorative elements to load-bearing constructions. This versatility makes fiberglass products a highly universal solution for many contractors and builders.

Studies ([Kopzhasarov et al., 2024](#)) conducted on the physical and mechanical properties of concrete with polypropylene macro- and microfibers have shown an improvement in the strength and frost resistance of road slabs. However, the use of glass fiber has additional advantages, such as high corrosion resistance and greater mechanical strength, which allows it to be used in more critical structures. Due to their dimensional stability under significant temperature fluctuations and high durability, glass fiber materials significantly outperform synthetic fibers in terms of performance characteristics.

Fiberglass products are applied in various areas of construction:

- used for reinforcing concrete structures and creating fiber-reinforced concrete, increasing their strength and resistance to cracking, ([Figure 1](#)).
- fiberglass boards and mats are used as insulation materials for thermal and sound insulation in residential construction ([Figure 2](#)).

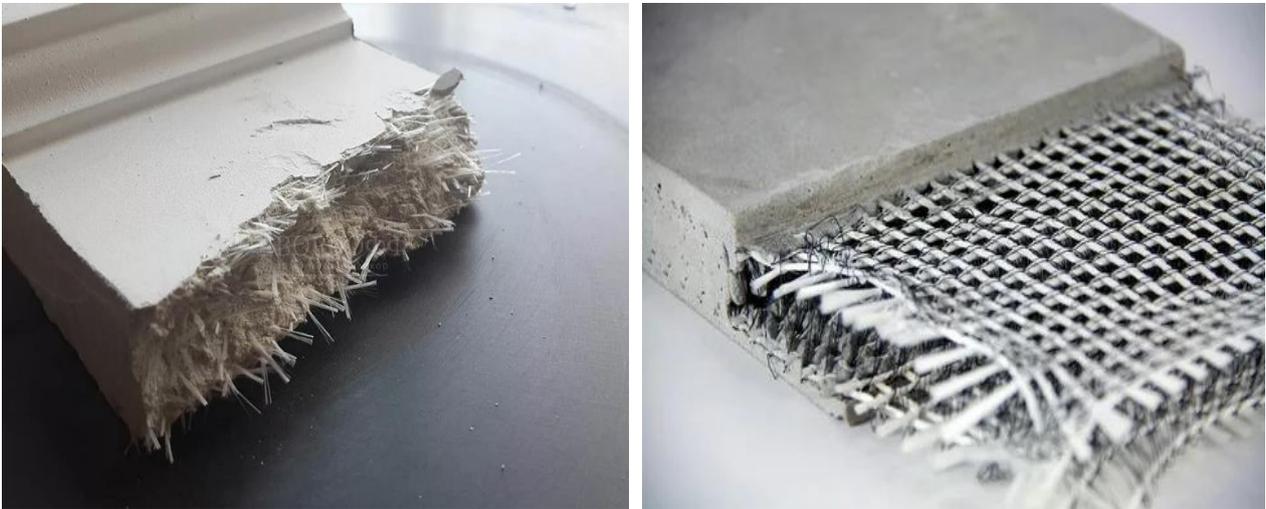


Figure 1 – Concrete slabs reinforced with fiberglass
([Global-ZBI Reinforced Concrete Products Catalog, 2025](#))

- due to its resistance to weathering, fiberglass is used in the production of facade panels, which can retain their properties for a long time under environmental conditions ([Figure 3](#)). Fiberglass products demonstrate high resistance to ultraviolet radiation, temperature fluctuations, moisture, and many other environmental factors. This makes them ideal for use in outdoor applications such as street furniture, outdoor advertising, and landscape design elements. An important aspect of fiberglass products is their durability. With proper use and maintenance, fiberglass items can last for decades. Fiberglass is not susceptible to corrosion, decay, or pest damage, making it an ideal material for exterior surfaces such as roofs, facades, and water structures;

Research conducted by ([Kopzhasarov et al., 2024](#)). Tests of the physical and mechanical properties of concrete with polypropylene macro- and microfibers showed an improvement in the strength and frost resistance of road slabs, but the use of glass fiber has additional advantages, such as high corrosion resistance and greater mechanical strength, which allows it to be used in more critical structures. Due to their dimensional stability under significant temperature fluctuations and high durability, glass fiber materials significantly outperform synthetic fibers in terms of performance characteristics.

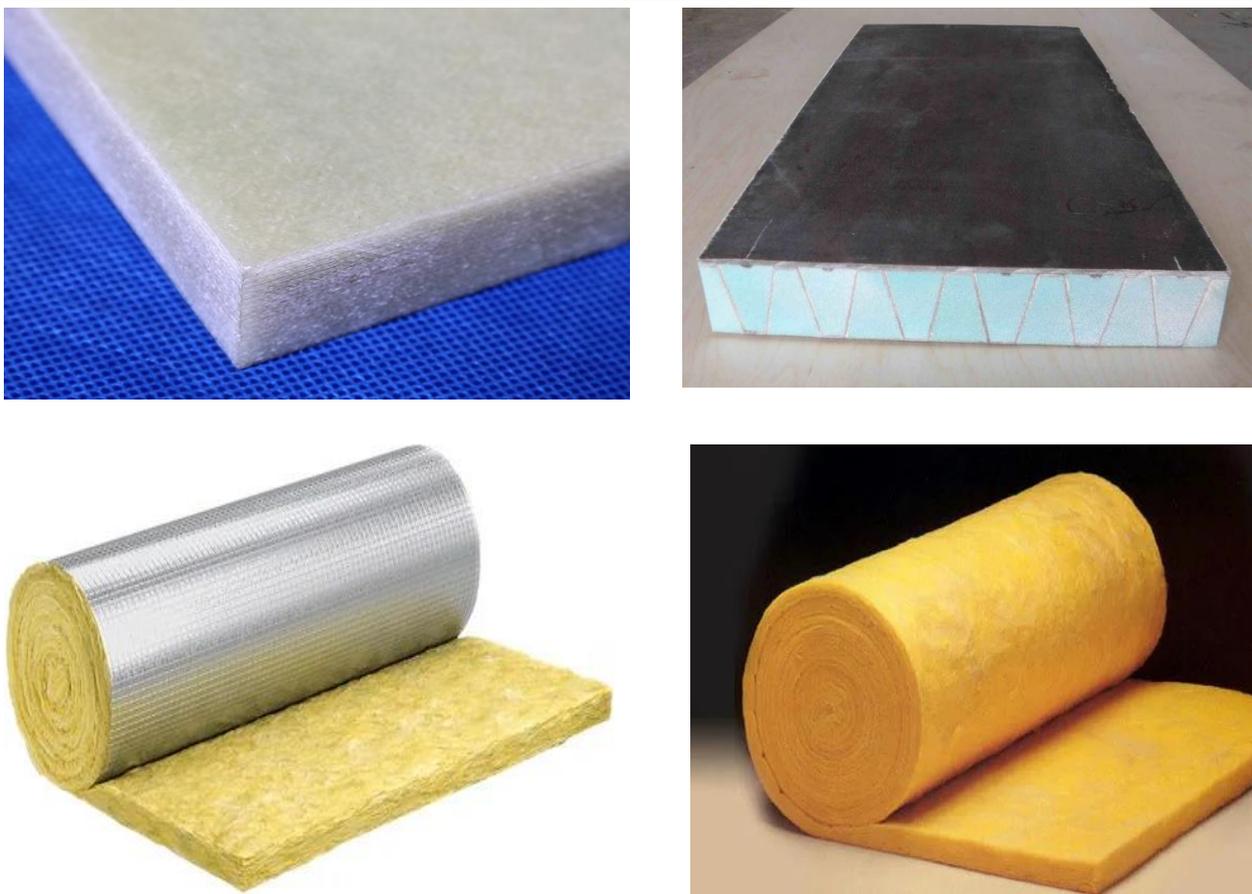


Figure 2 – Modern fiberglass-based thermal insulation materials (Catalog of materials from FSUE “VIAM”, Composite-PROF LLC, MILANCHIK's library, 2025)



Figure 3 – Fiberglass architectural membrane (Milanchik's library, 2025)

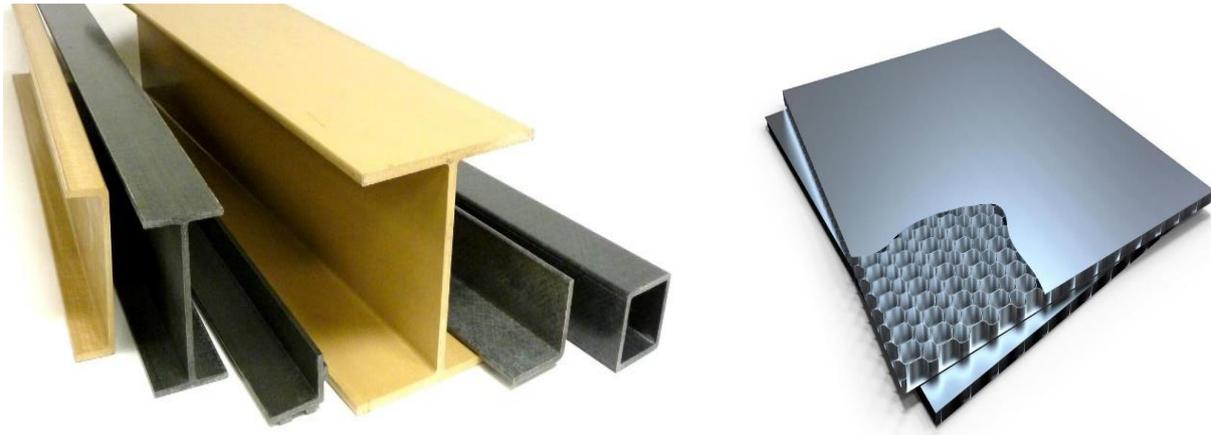


Figure 4 – Fiberglass profile and sandwich panels (Global-ZBI Reinforced Concrete Products Catalog, 2025)

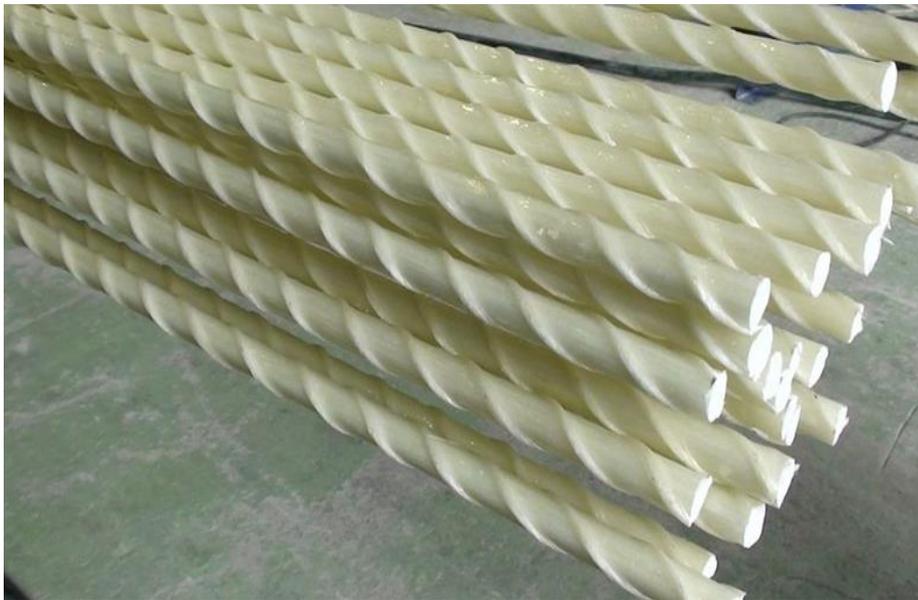


Figure 5 – Fiberglass reinforcement (Product catalog of the Heltex factory.2025)

- the light weight of fiberglass products, such as composite beams and panels, makes them ideal for constructing lightweight structures, significantly reducing the weight of buildings (Figures 4-5). Compared to metal counterparts, fiberglass is considerably lighter, which decreases the overall weight of the structure and, consequently, the costs of transportation and installation. Fiberglass is easy to process, allowing the creation of complex-shaped products. This enables structural elements to be adapted to specific project requirements, providing a customized approach for each order. Fiberglass materials can be colored in various shades and finished in different ways, allowing the production of aesthetically appealing products. Compared to metal and wood alternatives, fiberglass is much lighter, simplifying transportation and installation. The material's light weight not only saves on shipping costs but also reduces structural load requirements, thereby lowering the overall project cost;

- fiberglass products hold a special place in the production of pipelines for various purposes due to their successful resolution of many economic, operational, construction, and transportation issues.



Figure 6 – Fiberglass pipes. (Polymer Industry Portal, 2025)

Fiberglass consists of extremely fine glass fibers, which can be formed into various shapes, such as threads, fabrics, or composites. The production of fiberglass involves high-temperature melting of glass, which is then drawn into fine filaments. These filaments, due to their high tensile strength, can be used to reinforce various plastics or other composite materials.

In the work (Akhmediev et al., 2024) analyzed the technical problems of using composite materials in three-layer panel structures, including the use of fiberglass in flexible ties. The study identified the causes of cracking and made it possible to develop recommendations for improving the strength of panels using glass fiber and other composite materials.

One of the key aspects of fiberglass is its high strength. The material has excellent mechanical properties, allowing it to withstand significant loads. Structures combining fiberglass with polymers can achieve strengths 5–6 times higher than ordinary concrete. This makes fiberglass indispensable in construction, where structural load resistance is of primary importance.

The experiment conducted (Pralieva et al., 2025) showed that increasing the area of the upper section reduces the strength properties of concrete and contributes to the formation of micro-fractions, which is a critical factor for the durability of structures. The use of glass fiber materials in concrete mixtures increases the load-bearing capacity by improving load distribution and preventing the development of cracks in areas with large cross-sections. Due to its high strength and corrosion resistance, glass fiber effectively reduces the coefficient of variation in strength, ensuring structural uniformity and increasing the overall reliability of concrete.

Fiberglass also exhibits high resistance to cracking and deformation. These properties are particularly important for products subjected to variable loads. Fiberglass is resistant to ultraviolet radiation. Modern technologies allow the incorporation of special additives into fiberglass, protecting the material from the destructive effects of sunlight.

Tire production waste, amounting to 0.5-1% of the mass of bentonite clays, effectively intensifies the expansion of expanded clay when fired at $1120^{\circ}\text{C} \pm 20^{\circ}\text{C}$, increasing its porosity and contributing to the creation of lightweight concrete with improved seismic resistance for brick buildings (Seytkasymuly et al., 2024). Combining such expanded clay with glass fiber additive (0.6 kg/m^3) strengthens the dispersed reinforcement of concrete, preventing cracks from opening and increasing the impact strength, water resistance, and frost resistance of the matrix. This synergistic use of tire waste and glass fiber optimizes the structure of lightweight concrete, reducing shrinkage and creep, which is especially important for seismically active regions. The same principle is applied in (Seytkasymuly et al., 2024) for the production of lightweight concrete from expanded clay.

In modern technologies for manufacturing fiberglass-reinforced plastic (FRP) pipes, the FLOWTITE technology is used. This is a method of producing GRP pipes through continuous filament winding. FLOWTITE, which provides resistance to galvanic and electrolytic corrosion, is an ideal choice for water supply pipelines. Along with corrosion resistance, its light weight and large dimensions (standard 6 and 12 meters, with some production reaching 18 meters) improve the efficiency of pipe installation, and the smooth inner surface ensures high hydraulic performance.

During the production of fiberglass-reinforced plastic pipes, a continuous fiberglass winding method is applied onto a core (Figure 7). Due to the rotation of the core, circumferential reinforcement occurs, allowing the production of high-quality products at a low cost.

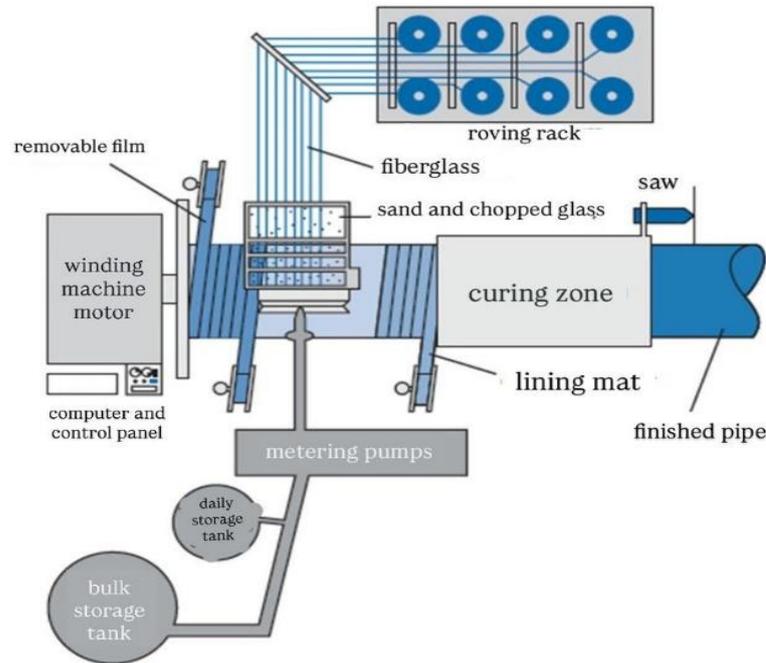


Figure 7 – Fiberglass-reinforced plastic pipe manufacturing scheme (Flowtite piping systems, 2025)

Fiberglass is characterized by a linear density, defined as the weight in grams per 1000 meters of length. In pipe production, special attention is given to the specific ring stiffness $S(\text{n/m}^2)$, which measures the resistance to circumferential deformation per meter of length under an external load:

$$S = \frac{E \cdot I}{d_m^3} \quad (1)$$

Where:

E – apparent modulus of elasticity (n/m^2);

d_m – average pipe diameter, in meters (m);

I – moment of inertia of the cross-sectional area in the longitudinal direction per meter of length, in meters to the fourth power per meter (m^4/m).

$$I = \frac{e^3}{12} \quad (3)$$

Where:

e – wall thickness, in meters (m).

Fiberglass pipes are practically resistant to corrosion. According to the international astm standards, the minimum value of specific corrosion under stressed conditions can reach:

Table 1
Minimum value of specific corrosion under stressed conditions

Stiffness class	SSpecific corrosion value under stressed conditions, %
SN 2500	0.49 (t/d)
SN 5000	0.41 (t/d)
SN 10000	0.34 (t/d)

For a fifty-year service life of a fiberglass pipe, the predicted corrosion value (**Figure 8**) under stressed conditions can reach 0.67%.

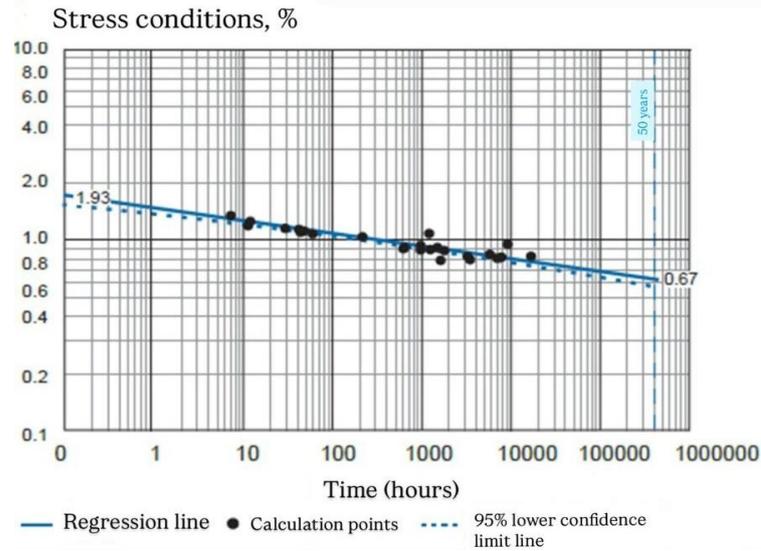


Figure 8 – Corrosion resistance chart under stressed conditions (**Flowtite piping systems.2025**)

The predicted deformation (**figures 9**) of fiberglass pipes over a fifty-year service life can reach 0.65% :

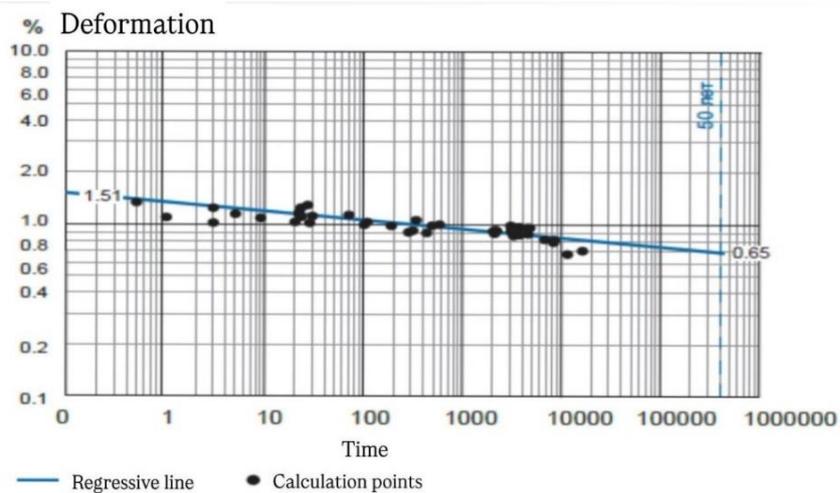


Figure 9 – Deformation under pressure chart (**Flowtite piping systems.2025**)

Good performance is also observed under stressed diametral deformation (**Figures 10.11**) for a pipe submerged in water:

In (**Fang et al., 2022**), the mechanical properties of fiberglass pipes were considered separately rather than as a single structure, i.e., the fiberglass and polyethylene components were tested individually. Considering the plasticity of polyethylene and the failure stress of fiberglass, the researchers assumed that failure in reinforced pipes occurs through stretching and high internal pressure. Based on the test results, the following conclusions were drawn: a) sample failure under tension occurs at the pipe edge due to the edge effect; b) under high internal pressure, the pipe does not rupture, as axial stress in the fiberglass under tension is linear, whereas under internal pressure it is nonlinear; c) under tension, stress in the middle-reinforced layers of the fiberglass is low. According to these results, it can be concluded that fiberglass pipes can have a longer service life compared to

metal pipes.

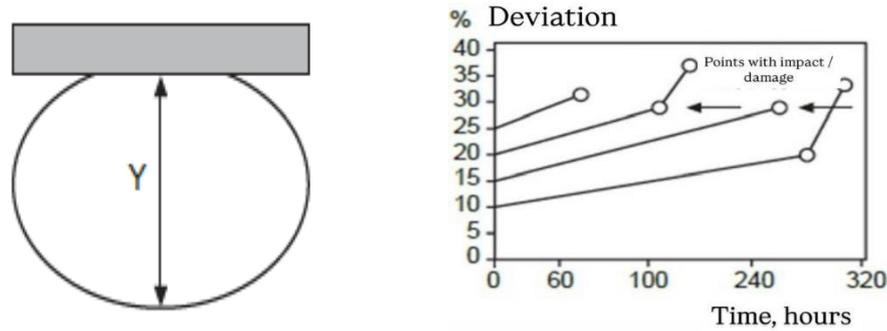


Figure 10 – Effect of long-term loading in water on diametral deformation (Flowtite piping systems.2025)

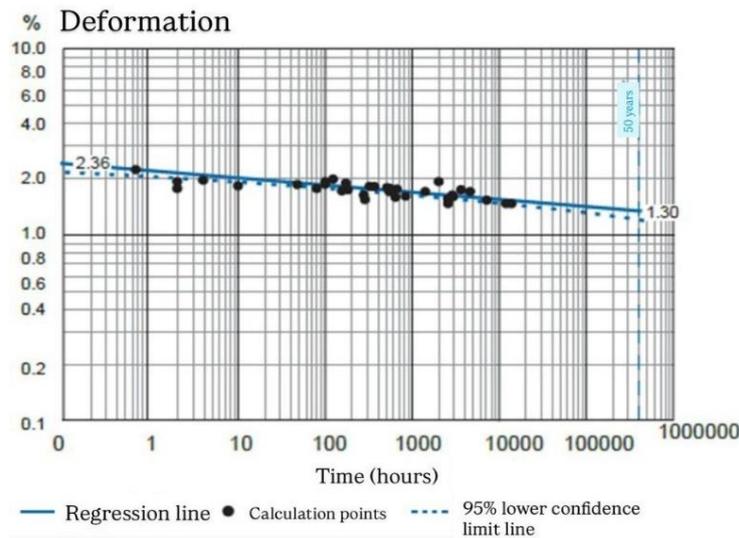


Figure 11 – Diametral deformation chart under long-term loading on a pipe in water (Flowtite piping systems.2025)

Researchers in (Gibson et al., 2011; Abdul Majid et al., 2011) applied the UEWS test, a method used to determine the ultimate elastic wall stress of pipe walls. This is a short-term test to ensure that pipes can withstand long-term regression testing in accordance with ISO 14692 or ASTM D2992. During the test, pressure is applied inside the pipe, held, and then released to a set value in one cycle. Ten such cycles constitute one group of cycles at a constant pressure level. The procedure continues with increasing pressure levels until leakage occurs in the pipe.

The UEWS test is considered one of the most effective in terms of accuracy and speed (As-saleh, 2011). It is also sensitive to changes in key production parameters and raw materials (Gabbasa, 2019). UEWS stands for “Ultimate Elastic Wall Stress.” UEWS tests are used to detect manufacturing variations and verify the design basis of composite pipes. They serve as an alternative to the standard 1000-hour procedure described in ASTM D2992 (Amin, 2013).

As a result of the study, the authors in (Gibson et al., 2011) concluded that when modeling damage in fiberglass-reinforced plastic pipes, Miner’s rule is effective for simulating damage caused by combined static and cyclic effects, and that damage is directly related to the growth of cracks in the pipe layers. The applied method can serve as a basis for studying pipe strength and determining its service life under any combination of static, fatigue, hydrostatic, and non-hydrostatic (multiaxial) loads.

It is important to note the environmental safety of using fiberglass materials in construction (Kassa, 2019). The fiberglass manufacturing process involves the use of large amounts of energy and raw materials, often with high levels of carbon emissions. The main materials used are sand, lime, and soda. Other ingredients may be added: for increased chemical resistance, e.g., boron; for

enhanced heat resistance – alumina; for enriching glass with magnesium oxide – natural or synthetic magnesium carbonate. Although the process is less polluting than, for example, cement production, careful consideration of technologies and energy sources is still required (Kurnosov et al., 2011).

A major issue is the disposal of fiberglass products. Unlike organic materials, fiberglass does not decompose naturally, and its disposal can pose a significant problem (Ivshin et al., 2011). Some studies indicate that improperly disposed fiberglass can negatively affect the environment. While recycling technologies exist, they are not yet widely adopted. Efforts are needed to develop more efficient recycling methods and legislative initiatives to encourage the reuse of fiberglass materials.

To reduce environmental impact, construction companies are actively seeking alternative materials, such as composites based on natural fibers (Ablesimov et al., 2011). These materials can offer similar strength and lightness while leaving a smaller ecological footprint.

Assessing the future of fiberglass materials in construction requires consideration not only of their physical properties but also of their potential environmental impact. Innovative technologies, the use of secondary materials, and the development of recycling methods can lead to more sustainable use of fiberglass products.

Modern technologies and trends in resin production include reducing toxic content, switching to bio-resins, and using safe curing agents, which minimize harmful effects on the environment and workers. Automation of production and process optimization (e.g., RTM, vacuum infusion) improve product quality and parameter stability.

The authors propose a comprehensive approach to resin development, which includes:

- the creation of hybrid resins combining the best properties of epoxy and vinyl ester systems for maximum chemical resistance and adhesion;
- the integration of nanomaterials and functional additives to improve barrier properties and corrosion resistance;
- the application of rapid curing techniques with controlled shrinkage to reduce manufacturing defects;
- the development of environmentally safe compositions using recyclable and biodegradable components, expanding the potential for sustainable construction;
- continuous monitoring of resin quality using intelligent control systems during production.

It is also necessary to consider resin properties that need improvement for chemical resistance. Enhancing chemical resistance involves chemically modifying the resin structure to strengthen cross-linking, improve adhesion to fiberglass, and incorporate chemically resistant components, which significantly extend the service life of products in aggressive environments and reduce maintenance and repair costs.

These properties include increasing resistance of ester bonds, which are prone to chemical degradation, for example by increasing the content of chemically resistant structures such as novolac components and polystyrene fragments to improve resistance to acids and alkalis; improving wetting and bonding through resin modification with functional groups that provide strong attachment to fibers, i.e., adhesion to fiberglass, which reduces the likelihood of microcracks and increases mechanical strength; increasing the number of covalent bonds to raise molecular packing density and cross-link density of the polymer network, thereby reducing permeability to aggressive environments and enhancing thermal resistance. Thermal resistance can also be improved by increasing the glass transition temperature and resistance to thermo-oxidative degradation, allowing the product to maintain its properties in aggressive environments at high temperatures; incorporating mineral fillers and modifiers to enhance resistance to organic and inorganic acids, salts, solvents, and electrolytes for chemical inertness. During use, measures should be taken to minimize internal shrinkage and reduce the formation of microcracks, which directly affect product durability and performance.

In order to confirm that the use of fiberglass composites is a cost-effective solution in construction, a comparative analysis of their properties with other materials was carried out. Technical literature and building codes were studied to understand how strong, durable and easy to work with

they are. In particular, parameters such as tensile strength, resistance to moisture and temperature changes, material weight and cost were considered.

For example, glass fibre composites are generally lighter than metals and concrete, which can reduce transportation and installation costs. They are also corrosion-resistant, which increases the service life of structures and reduces repair costs. On the other hand, it is important to consider the cost of the composite materials themselves and the complexity of their processing. The study aims to clearly show in which cases the use of glass fibre composites will be most economically justified and technically feasible, taking into account all the pros and cons. The authors seek to provide builders and designers with clear and objective information for making informed decisions.

Table 2 compares the properties of glass fibre reinforced plastic (GFRP) with those of the most commonly used materials: steel and polyvinyl chloride (PVC).

Table 2

Comparative characteristics of building materials (compiled by the authors based on a review of scientific research)

Characteristics	Glass fibre (GFRP)	Steel (St3)	PVC
Density, g/cm ³	1,8-2,1	7,85	1,35-1,45
Specific weight (relative to steel)	20-25%	100%	~18%
Tensile strength, MPa	up to 1000	400-550	45-55
Corrosion resistance	Absolute (high)	Low (requires protection)	High (but sensitive to UV)
Service life, years	50+	20-25 (in aggressive environments)	25-30
Thermal conductivity, W/(m·K)	0,3 – 0,5 (low)	45–55 (high)	0,13 – 0,20

After analysing the above data, the following conclusions can be made with confidence:

1. Fibreglass. Weight characteristics - fibreglass products are 4-5 times lighter than their steel counterparts, which reduces the load on the foundation and cuts logistics costs by 20-30%. It has a very low density (comparable to PVC) and the highest strength limit among comparable materials. This is an ideal combination for structures where weight is important.

Strength and durability - despite its low weight, the strength characteristics of fibreglass (up to 1000 MPa) allow it to be used in critical load-bearing structures, and the absence of corrosion ensures operation for over 50 years without major repairs, which is twice the service life of steel in difficult conditions.

Environmental footprint - although fibreglass production is energy-intensive, its durability and lack of need for toxic anti-corrosion coatings make it a more sustainable solution in terms of life cycle (LCC analysis).

2. Steel. It has high strength, but its density (and therefore weight) is almost four times higher than that of fibreglass pipes; it requires constant expenditure on anti-corrosion protection in aggressive environments, which significantly reduces its cost-effective service life.

3. PVC. The lightest material, but its strength is insufficient for load-bearing structures; it has good chemical resistance, but is inferior to GFRP in terms of durability and stability under environmental influences (Amin, 2013; Gibson et al., 2011).

Comparative analysis of material resistance in aggressive environments. The most important advantage of fibreglass pipes (GFRP/GRE) is their chemical inertness. Unlike steel, which is susceptible to electrochemical corrosion, and PVC, which can lose its plasticity when exposed to certain solvents or ultraviolet light, fibreglass re

tains its structural properties in a wide range of aggressive environments. **Table 3** shows a comparison of the chemical resistance of materials to the most common aggressive factors in construction and industry.

Table 3

Comparative resistance of materials to aggressive environments

Aggressive environment	Glass fibre reinforced plastic (GFRP)	Steel (coated)	PVC
Seawater / Salt solutions	Excellent (does not corrode)	Low (requires active protection)	High
Acidic soils (pH < 4)	High	Very low (rapid through-corrosion)	High
Sulphuric acid (up to 25%)	High (special resins)	Low (destruction)	Average (depends on T°)
Petroleum products and fuel and lubricants	High	Average	Low (swelling/softening)
UV radiation (sun)	High (if a protective layer is present)	High	Low (becomes brittle over time)
Stray currents (in the ground)	Not susceptible (dielectric)	High degree of destruction	Not susceptible

To illustrate durability in aggressive conditions, Table 4 below shows operating parameters based on a life cycle assessment (LCA) of materials.

Table 4

Pipeline durability parameters in aggressive environments (compiled by the authors)

Comparison parameter	Glass fibre reinforced plastic pipe (GFRP)	PVC pipe	Steel pipe (with insulation)
Average service life in aggressive soil	50+ years	20–25 years old	10–15 years
The necessity of anti-corrosion protection	Not required	Not required	Mandatory (mastics, ECHZ)
Loss of strength after 10 years of operation	< 3–5% (property stability)	10–15% (polymer degradation)	30–50% (due to corrosion)
Service costs	Minimum	Low	High (regular monitoring)

Analysis of the data obtained. As can be seen from the data presented, steel pipes require significant costs for electrochemical protection (ECP) and the application of anti-corrosion coatings, which lose their integrity over time. In marine climates or saline soils, steel can fail after only 5–7 years.

PVC pipes demonstrate good resistance to salts, but they are limited in terms of temperature (they lose strength when heated above 40–50°C) and are sensitive to organic solvents.

Glass fibre based on epoxy or vinyl ester resins demonstrates the most stable performance. Due to the absence of metal in their composition, such pipes are completely immune to pitting corrosion and destruction under the influence of stray currents, which makes them indispensable in the construction of facilities near railways, power lines and in coastal areas.

Economic efficiency and operating cost analysis. One of the key characteristics determining the advantage of glass fibre reinforced plastic (GFRP/GRP) products is a significant reduction in total cost of ownership by minimising maintenance and repair costs. Although the initial material costs may be 15–25% higher than steel, the absence of corrosion virtually eliminates the costs of anti-corrosion protection and restoration work.

Table 5 presents a quantitative comparison of the costs of maintaining and repairing fibreglass and steel structures over their life cycle (60 years).

Table 5

Comparative analysis of operating and maintenance costs (based on a 60-year life cycle)

Expense item/ Description	Steel structures	Glass fibre reinforced plastic (GFRP)	Percentage reduction in costs (%)
Frequency of scheduled maintenance	Once every 8–12 years	Virtually no requirement	—
Technical maintenance costs	Base level (100%)	Decrease by 60–75%	60–75%
Cost of repair and replacement	High (corrosion ~ 40% of budget)	90% reduction	90%
Service life until complete replacement	20 – 40 years old	80–100 years	~2.5 times longer
Total life cycle cost	Base level (100%)	Decrease by 20–40%	20–40%

Quantitative analysis of cost reduction. Studies show that in aggressive environments (sea-side, chemical plants), steel corrosion consumes up to 40% of the total infrastructure maintenance budget (Gerhardus, et al., 2002).

The break-even point for fibreglass structures under aggressive conditions occurs after 8-12 years of operation. After this period, savings on repairs and the absence of replacement costs become pure profit for the project, accounting for 19% to 40% of the total life cycle cost (Dhinkaran, et al., 2016; Divya Brijesh Patel, 2023).

The use of fibreglass allows the following savings to be achieved:

- reduction in operating costs - in road construction and pavement reinforcement in saline soils, maintenance savings reach 45%;
- reduction in replacement costs - thanks to an estimated service life of over 50-75 years (compared to 25 years for steel), the cost of complete replacement of structures is reduced by 90% over a 30-year period;
- savings on logistics and installation - low weight of the material (20-25% of the weight of steel) reduces labour costs by 30-40% and eliminates the need for heavy lifting equipment (Thomas Cadenazzi, et al., 2019).

Analysis of the energy efficiency of fibreglass structures. Energy efficiency is an important indicator for modern construction projects. In this study, the energy efficiency of fibreglass products is examined through the prism of two factors: thermal resistance and hydraulic efficiency of systems.

1. Reduction of heat loss. Glass fibre has an extremely low thermal conductivity coefficient ($\lambda \approx 0.3-0.5 \text{ W/m}\cdot\text{K}$) compared to metals (steel $\approx 50 \text{ W/m}\cdot\text{K}$). In construction, this allows minimising ‘cold bridges’ when using composite reinforcement and facade systems; reducing the cost of heating and air conditioning buildings by maintaining a stable temperature inside structures.

2. Hydraulic efficiency (for pipelines). The inner surface of fibreglass pipes is characterised by a high degree of smoothness. The roughness coefficient according to the Hazen-Williams formula for fibreglass is $C \approx 150$, while for new steel pipes this figure is 120, and for pipes in service it drops to 60-80 due to corrosion and deposits. Table 6 presents a comparative analysis of energy consumption.

Life cycle energy analysis. The use of fibreglass improves the thermal performance of buildings and significantly reduces the operating energy costs of engineering systems.

Quantitative analysis shows that due to the absence of corrosion growth on the inner walls of pipes, the throughput capacity of fibreglass systems remains unchanged throughout their entire service life (50+ years) (International Standard ISO 14692). In steel systems, after 10–15 years of operation, pump capacity must be increased by 25–30% to overcome increased hydraulic resistance, which leads to direct energy overconsumption.

Table 6

Comparison of energy efficiency indicators for materials (compiled by the authors)

Energy efficiency parameter	Glass fibre reinforced plastic (GFRP)	Steel	Effect of implementation
Thermal conductivity coefficient, W/(m·K)	0,35	52,0	150 times reduction in heat loss
Smoothness coefficient (Hazen-Williams)	150	100–120	Consistently high flow efficiency
Friction losses in pipes	Minimum	High (increase over time)	Reduction in pump energy consumption by 15–20%
Energy costs for installation	Low (lightweight)	High (heavy equipment)	Fuel savings during construction

Comparative analysis of environmental indicators and life cycle. To objectively assess the environmental impact of fibreglass products, the authors conducted a comparative analysis of the life cycle of fibreglass (GFRP), steel and PVC. The analysis covers the stages of raw material extraction, energy consumption in production, logistics and recycling options. Table 7 presents key environmental indicators for the materials under consideration.

Assessment of total impact. Although steel production requires slightly less energy per kilogram of material, fibreglass is more environmentally friendly when calculated per unit of functional structure. This is because four times less fibreglass by weight than steel is required to achieve similar strength characteristics.

Table 7

Comparative environmental performance of materials throughout their life cycle

Life cycle stage / Indicator	Glass fibre reinforced plastic (GFRP)	Carbon Steel	Polyvinyl chloride (PVC)
Resource intensity of raw materials	Sand, resins (available resources)	Iron ore, coal (intensive mining)	Oil and gas (non-renewable fossil fuel)
The amount of energy expended to produce a unit of mass of material (including extraction, processing, transport, manufacturing, and sometimes disposal), MJ/kg	30–50	25–35	55–70
CO ₂ emissions during production (kg CO ₂ /kg)	1.5 – 2.5	2.0 – 3.0	2.5 – 3.5
Transport footprint	Low (low weight reduces fuel consumption by 30%)	High (requires heavy equipment)	Low
Toxicity during operation	Inert material (no leaching)	Release of oxides during corrosion	Possible migration of plasticisers
End of service life (disposal)	Grinding (as a filler), heat treatment	100% recyclable	Partial recycling, landfill

The environmental advantage of fibreglass:

- reduction of carbon footprint in logistics - due to the fact that the weight of fibreglass pipes is only 20-25% of the weight of steel pipes, carbon dioxide emissions during transportation and installation are reduced by an average of 40-50%;

- durability as a factor in sustainable development - the standard service life of fibreglass (50–80 years) exceeds the service life of steel in corrosive environments by 2–3 times. This means that

over the course of one life cycle of a fibreglass object, a steel object will require at least one complete replacement, which doubles its environmental footprint;

- no secondary pollution - fibreglass is not subject to corrosion, which prevents metal oxidation products or toxic anti-corrosion coatings from entering the soil and groundwater (Xiaobing Li, et al., 2024).

Recycling issues. It should be noted that, unlike steel, which has high recycling potential, recycling fibreglass is a more complex process. Currently, the most effective methods are mechanical recycling (crushing for use in road construction or cement production) and thermal processing with energy recovery. Nevertheless, the overall environmental impact of fibreglass per year of operation remains 25–30% lower than that of traditional materials.

Summarizing the advantages of fiberglass pipes using resin, the following benefits over metal pipes can be highlighted:

- long service life – over 50 years, with more than 30 years of global application experience;
- significantly lower weight compared to pipes made of other materials (20–25% of the weight of steel pipes);
- ease of installation – pipes are connected using couplings, with no welding or inspection of welds required, resulting in significant savings on construction and installation works;
- high corrosion resistance – expensive anti-corrosion measures are not required during construction, unlike with steel pipes;
- universal chemical resistance;
- resistance to abrasive wear;
- possibility of installation throughout the year;
- low cost dependence compared to metal and polyethylene pipes on fluctuations in oil, natural gas, metal, and energy prices;
- high environmental and sanitary-hygienic performance.

4 CONCLUSIONS

Fiberglass products represent an innovative and high-tech material that opens new horizons in the construction industry. The material is unique, possessing high strength and durability; it is a versatile material that combines strength, lightness, and resistance to external influences. Fiberglass finds applications across various sectors and continues to evolve thanks to new technologies and innovations in materials science:

- glass fiber reinforced plastic products (GFRP reinforcement, GRP pipes) demonstrate tensile strength of up to 1000 MPa and durability of 50+ years in UEWS tests according to ASTM D2992 and ISO 14692;

- LCC analysis shows a 20-30% reduction in operating costs compared to metal counterparts due to corrosion resistance;

- fiber hybridization increases impact strength by 181-200% (Swolfs et al., 2014), confirmed by empirical data on FLOWTITE pipes (SN 2500-10000).

- production properties: molding temperature 1120°C, resistance coefficient 0.5-1 (data for 2024-2025);

- application in construction: 75% reduction in structural weight, use in reinforcement and pipes with a diameter of 6-18 m;

- prospects - processing using Oliveux et al. (2015) technologies, lifetime modeling according to Gibson (2011), etc.

Due to its unique properties, fiberglass will continue to be actively used in creating safe, durable, and cost-effective construction solutions. Its application in different industries opens new opportunities for building lightweight, strong, and environmentally resistant structures. Fiberglass not only simplifies construction and manufacturing processes but also significantly reduces time and costs. Understanding the main aspects of using fiberglass products allows for their effective utiliza-

tion and ensures the longevity and reliability of finished structures.

Fiberglass materials have the potential to significantly improve construction processes; however, associated environmental issues must be carefully considered. Approaches to production, disposal, and alternative materials should become part of an overall sustainable development strategy in the construction industry. Integrating environmental principles into the business models of manufacturers will not only help preserve nature but also create competitive advantages in the growing green construction market. In the future, with the advancement of technologies, we will see an even wider range of fiberglass applications in construction, contributing to improved quality of life and environmental preservation.

The study confirms the priority of fiberglass materials in construction due to savings of 20–75% in weight/cost.

Considering all the advantages described above, it can be confidently stated that fiberglass will become even more popular in the future, offering solutions for a wide variety of cha

Despite the identified advantages of glass fibre composites, their widespread integration into the construction industry is associated with a number of unresolved scientific and practical issues that necessitate further research.

Unresolved scientific and practical issues. Based on the analysis conducted, the authors have identified the following problem areas:

1. Although the estimated service life exceeds 50 years, the ageing processes of the polymer matrix under the simultaneous influence of cyclic loads, critical temperatures, aggressive environments, i.e. the mechanisms of long-term degradation, have not been sufficiently studied. It is necessary to develop more accurate mathematical models for predicting fatigue strength.

2. Unlike steel and concrete, organic resin-based fibreglass composites are susceptible to degradation at high temperatures and may release toxic substances when burned. This limits their use in high-rise residential construction and necessitates the search for new flame retardants in the field of fire resistance and fire safety.

3. Thermosetting resins used as binders are extremely difficult to recycle. The problem of recycling (disposal) and the development of cost-effective technologies for breaking down composites into fractions for reuse remain an open question in green chemistry.

4. At present, the regulatory framework for composites in construction is less developed than for traditional materials. The lack of unified standards needs to be addressed, as it creates bureaucratic and engineering difficulties in the design of critical structures.

Justification for further research. The need to continue research in the field of glass fibre technologies is justified by the global trend towards carbon neutrality and resource efficiency.

Solving the problem of butt joints and standardisation will reduce design costs by 15–20%, which will resolve economic issues. From a technological perspective, it is necessary to study hybrid materials (e.g. basalt-fibreglass composites), which could lead to the creation of structures with controllable stiffness properties. Finally, the environmental aspect: without the development of clear disposal protocols, the widespread use of composites could create an environmental burden in the future, making scientific research in the field of ‘bio-resins’ and biodegradable polymers critically important.

REFERENCES

1. **Hollaway, L. C.** (2010). A review of the present and future utilisation of FRP composites in civil infrastructure with reference to their important in-service properties. *Construction and Building Materials*, 24, 2419–2445. <https://doi.org/10.1016/j.conbuildmat.2010.04.062>
2. **Pickering, K. L., Efendy, M. G. A., & Le, T. M.** (2016). A review of recent developments in natural fibre composites and their mechanical performance. *Composites Part A: Applied Science and Manufacturing*, 83, 98–112. <https://doi.org/10.1016/j.compositesa.2015.08.038>
3. **Bank, L. C.** (2006). *Composites for construction: Structural design with FRP materials*. John Wiley & Sons. <https://doi.org/10.1002/9780470121429>

4. **Islam, M. M., Choudhury, M. S. I., & Amin, A. F. M. S.** (2016). Dilation effects in FRP-confined square concrete columns using stone, brick, and recycled coarse aggregates. *Journal of Composites for Construction*, 20(1). [https://doi.org/10.1061/\(ASCE\)CC.1943-5614.000057](https://doi.org/10.1061/(ASCE)CC.1943-5614.000057)
5. **Nassif, N., Junaid, M. T., Maalej, M., Altoubat, S., & Barakat, S. A.** (2024). Progress, innovations and challenges based on bibliometric analysis. *Civil Engineering Journal*, 10, 136–173. <https://doi.org/10.28991/cej-sp2024-010-09>
6. **Vasiliev, V. V., & Morozov, E. V.** (2018). *Advanced mechanics of composite materials and structures* (4th ed.). Elsevier. <https://doi.org/10.1016/B978-0-08-102209-2.00014-1>
7. **Triantafillou, T.** (2016). *Textile fibre composites in civil engineering*. Elsevier Science.
8. **Robert, M., & Benmokrane, B.** (2012). Combined effects of saline solution and moist concrete on long-term durability of GFRP reinforcing bars. *Construction and Building Materials*, 38, 274–284. <https://doi.org/10.1016/j.conbuildmat.2012.08.021>
9. **Li, H., & Watson, J. C.** (2019). Continuous glass fibre formation. In *Springer handbook of glass* (pp. 1409–1452). Springer
10. **Barbero, E. J.** (2017). *Introduction to composite materials design* (3rd ed.). CRC Press.
11. **Yentl, S., Larissa, G., & Ignaas, V.** (2024). Fibre hybridisation in polymer composites: A review. *Composites Part A: Applied Science and Manufacturing*, 67, 181–200.
12. **D'Antino, T., Pisani, M. A., & Poggi, C.** (2018). Effect of the environment on the performance of GFRP reinforcing bars. *Composites Part B: Engineering*, 141, 123–136.
13. **Schober, K.-U., Harte, A., Klinger, R., Jockwer, R., Xu, Q., & Chen, J. F.** (2016). Glass-FRP in architectural and structural applications. In *Textile Fibre Composites in Civil Engineering* (pp. 321–341). Woodhead Publishing.
14. **Karbhari, V. M.** (2010). Durability of composites for civil structural applications. In *Durability of Composites for Civil Structural Applications* (pp. 1–11). Woodhead Publishing.
15. **Keller, T., & Bai, Y.** (2016). Structural performance of FRP composites in fire. *Advances in Structural Engineering*. <https://doi.org/10.1260/1369-4332.13.5.793>
16. **Oliveux, G., Dandy, L. O., & Leeke, G. A.** (2015). Current status of recycling of fibre reinforced polymers: Review of technologies, reuse and resulting properties. *Progress in Materials Science*, 72, 61–99. <https://doi.org/10.1016/j.pmatsci.2015.01.004>
17. **Tolmachev, A. A., & Ivanov, V. A.** (2019). Prospects for the use of fiberglass and polymer-metal pipes [Perspektivy primeneniya stekloplastikovyykh i polimetallicheskiykh trub]. *Oil and Gas*, 6, 132–139. (In Russ.)
18. **Motseykis, R., Kichaite, A., Skripkyunas, G., & Yakovlev, G. I.** (2018). Mechanical characteristics of reinforced glass fiber concrete with a modified matrix [Mekhanicheskie kharakteristiki armirovannogo steklovoloknom betona s modifitsirovannoy matritsey]. *Building Materials*, 12, 27–33. <https://doi.org/10.31659/0585-430X-2018-766-12-27-33> (In Russ.)
19. **Duyunova, V. A., Kutyrev, A. E., Serebrennikova, N. Yu., Vdovin, A. I., & Somov, A. V.** (2021). Study of the effect of aggressive external environmental factors on the development of corrosion damage in SIAL class layered metal-glass plastic samples [Issledovanie vliyaniya faktorov agressivnoy vneshney sredy na razvitiye korrozionnogo povrezhdeniya obraztsov sloistogo metallostekloplastika klassa SIAL]. *Materials Testing*, 65(4), 81–90. (In Russ.)
20. **Kopzhasarov, B. T., Akhmetov, D. A., Zhagifarov, A. M., Abdraimov, I. E., Kuttibay, M. T., & Zhumaidilova, Zh. O.** (2024). Effectiveness of improving the quality of road slabs through the use of microsilica and fiber. *Bulletin of the Kazakh Leading Academy of Architecture and Civil Engineering*, 2(92), 76–90. <https://doi.org/10.51488/1680-080X/2024.2-06>
21. **Akhmediev, S. K., Tokanov, D. T., Bakirov, M. Zh., Toleubaeva, Sh. B., Tolkynbaev, T. A., & Tashmukhanbetova, I. B.** (2024). Current problems in the use of composite flexible connections in external three-layer wall panels. *Bulletin of the Kazakh Leading Academy of Architecture and Civil Engineering*, 4(94). <https://doi.org/10.51488/1680-080X/2024.4-10>
22. **Praliev, M. Zh., Nashiraliev, Zh. T., & Begaliev, U. T.** (2025). Analysis and evaluation of experimental methods for determining concrete strength. *Bulletin of the Kazakh Leading Academy of Architecture and Civil Engineering*, 3(97), 108–125. <https://doi.org/10.51488/1680-080X/2025.3-08>
23. **Seytkasymuly, Q., Kunanbayeva, Ya. B., Zhakipbayev, B. E., Abekov, K. O., & Durmus, G.** (2025). Keramzit lightweight concrete for improving the seismic resistance of brick buildings. *Bulletin of the Kazakh Leading Academy of Architecture and Civil Engineering*, 2(96), 111–124. <https://doi.org/10.51488/1680-080X/2025.2-11>

24. Seytkasymuly, Q., Kunanbayeva, Y. B., Zhakipbayev, B. E., Abekov, K. O., Kultaeva, Sh. M., Durmus, G., & Duisenbekov, B. K. (2025). On the seismic resistance of brick buildings based on expanded clay with coal mining waste and inorganic additives. *Bulletin of the Kazakh Leading Academy of Architecture and Civil Engineering*, 3(97), 128–136. <https://doi.org/10.51488/1680-080X/2025.3-09>
25. Fang, P., Xu, Y., Gao, Y., Ali, L., & Bai, Y. (2022). Mechanical responses of a fiberglass flexible pipe subject to tension and internal pressure. *Thin-Walled Structures*, 181. <https://doi.org/10.1016/j.tws.2022.110107>
26. Gibson, A. G., Abdul Majid, M. S., Assaleh, T. A., Hale, J. M., Fahrer, A., Rookus, C. A. P., & Hekman, M. (2011). Qualification and lifetime modeling of fiberglass pipe. *Plastics, Rubber and Composites*, 40(2), 80–85. <https://doi.org/10.1179/174328911X12988622800972>
27. Abdul Majid, M. S., Afendi, M., Daud, R., Gibson, A. G., & Hekman, M. (2013). Effects of winding angles in biaxial ultimate elastic wall stress tests of glass fibre reinforced epoxy composite pipes. *Advanced Materials Research*, 795, 424–428. <https://doi.org/10.4028/www.scientific.net/AMR.795.424>
28. Assaleh, T. A., & Almagguz, L. A. (2014). Ultimate elastic wall stress test under biaxial loading for glass-fibre reinforced epoxy pipes. *Advanced Materials Research*, 974, 188–194. <https://doi.org/10.4028/www.scientific.net/AMR.974.188>
29. Gabbasa, A. (2019). Alternative method for qualifications of glass fibre reinforced epoxy pipes. *Scientific Journal of Applied Sciences of Sabratha University*.
30. Amin, N. A. M. (2013). Modelling of multi-axial ultimate elastic wall stress test for glass fibre reinforced epoxy composite pipes. *Applied Mechanics and Materials*.
31. Kassa, F. (2019). Glass fiber: Its properties and applications. Retrieved from <https://moluch.ru/archive/244/56314>
32. Kurnosov, A. O., Vavilova, M. I., & Melnikov, D. A. (2018). Technologies for the production of glass fillers and investigation of the influence of sizings on the physicochemical characteristics of glass-reinforced plastics [Tekhnologii proizvodstva steklonapolniteley i issledovanie vliyaniya zamaslivayushchikh sostavov na fiziko-khimicheskie kharakteristiki stekloplastikov]. *Aviation Materials and Technologies*, 1(50), 64–70. <https://doi.org/10.18577/2071-9140-2018-0-1-64-70> (In Russ.)
33. Ivshin, S. S., Ivshina, A. A., Fedorov, A. V., & Zaripova, D. N. (2023). Recycling of fiberglass based on phenol-formaldehyde resin [Utilizatsiya stekloplastikov na osnove fenolformal'degidnoy smoly]. *Chemistry and Chemical Technology*, 66, 104–109. (In Russ.)
34. Ablesimov, N. E., & Malova, Yu. G. (2025). Basalt fiber: Research and scientific schools [Kamennoe (bazaltovoe) volokno: issledovaniya i nauchnye shkoly]. *Scientific Review. Technical Sciences*. Retrieved from <https://science-engineering.ru/ru/article/view?id=1120> (In Russ.)
35. Koch, G. H., Brongers, M. P. H., & Thompson, N. G. (2002). Corrosion costs and preventive strategies in the United States. NACE International.
36. Dhinakaran, G., Gowrisankar, S., & Jeyasehar, A. (2016). Life cycle cost analysis of glass fiber reinforced polymer reinforced concrete beam. *Asian Journal of Civil Engineering*, 17(4), 315–326.
37. Patel, D. B. (2023). Cost-benefit analysis of glass fiber reinforcement versus steel reinforcement in road construction. *International Journal of Creative Research Thoughts*, 11(7), 655–665.
38. Cadenazzi, T., Dotelli, G., Rossini, M., Nolan, S., & Nanni, A. (2019). Life-cycle cost and life-cycle assessment analysis at the design stage of a fiber-reinforced polymer-reinforced concrete bridge in Florida. *Advances in Civil Engineering Materials*, 8(2), 128–151. <https://doi.org/10.1520/ACEM20180113>
39. Li, X., Zhang, W., Zhang, C., Liu, J., Li, L., & Wang, S. (2024). Flexural behavior of GFRP and steel bars reinforced lightweight ultra-high-performance fiber-reinforced concrete beams with various reinforcement ratios. *Structures*, 70, 107897. <https://doi.org/10.1016/j.istruc.2024.107897>